

eaZI®flex VITROX 400

PENDULUM HINGE GLASS-GLASS CONNECTION

ORIGIN: RHEINAU, GERMANY

TYPE: EAZI®FLEX

SERIES: VITROX 400

MEDIUM: FLUID

HINGE TYPE: SWING DOOR HINGE

ART.-NO.: H010-00-003



The eaZI®flex VITROX 400 swing hinge is the perfect embodiment of elegant convenience. This innovative swing door hinge is installed as a connecting piece between a fixed part and a glass or wooden door and offers impressive functionality.

Innovative technology and versatility

With the eaZI®flex VITROX 400 pivot hinge, it is possible to open the door both inwards and outwards, up to an angle of 90 degrees. This double-sided opening allows the door to be used *flexibly* in a wide variety of rooms and situations. A particular highlight is the ability to lock the door in any position, which offers additional convenience and *flexibility*.

Automatic and soft closing

Another advantage of the eaZI®flex VITROX 400 is its ability to close automatically from a door position of 70 degrees. Closing is particularly gentle and quiet thanks to the integrated soft-close technology. This ensures that the door moves quietly and centred into the closed position, which is not only functional but also aesthetically pleasing.

Elegant design

The pendulum hinge impresses with its elegant design. The smooth surface gives the hinge a pleasant feel and a visually appealing appearance. With its slim shape and rounded edges, the eaZI®flex VITROX 400 blends harmoniously into the design of any door without being obtrusive. It combines form and function in a way that is both visually and practically appealing.

Convenient handling

The ease of use of the eaZI®flex VITROX 400 is outstanding. A gentle pull on the open door is all it takes to close it gently and quietly. The door rotates effortlessly to the centre and centres itself automatically, which makes handling the door much easier and at the same time conveys a feeling of high quality.

Highest quality from German production

Quality is a top priority at eaZi®flex VITROX 400. All hinges are manufactured in our production facility in Germany, with every single product undergoing 100% quality testing. These rigorous tests ensure that every swing hinge meets the highest standards and guarantees consistently high product quality. The eaZi®flex VITROX 400 pivot hinge is the ideal choice for your glass and wooden doors. It combines elegant design with maximum convenience and excellent quality, making it an outstanding solution for modern living and working spaces.

Our products are 100% tested

Our products are checked with a camera during production. The use of industrial image processing enables 100% inspection of critical geometric product features and ensures consistent quality.

CO2-neutral power generation: Regional and green

The Zimmer Group obtains all of its electricity from CO2-neutral sources. Part of this energy comes from a regional power plant, while the majority is generated by our own photovoltaic systems. The expansion work for additional photovoltaic modules is in full swing.

TECHNICAL DATA

Technology:	Defined Comfort
Limited use:	no
Field of application:	10-40 °C
Extended operation area:	no
Hinge type:	Swing door hinge
Load capacity per hinge:	40 kg
Damping:	Adjustable
Closure from:	70 °
Length:	161.5 mm
Width:	35 mm
Height:	110 mm
Fastening type on door side:	Clampable
Mounting type On-site:	Clampable
Opening direction:	Double-sided
Opening angle:	90 °
Adjustable zero position :	yes
Setting range:	5 °
Door thickness:	8-13.52 mm
Type of glass:	ESG/VSG

MATERIAL


Housing material:	Aluminium
Housing color:	black matt RAL9005
Housing surface:	anodized

TEST METHOD


Lifetime :	500,000 Cycles
Standard 1:	DIN EN 1154:2003
Standard 2:	DIN EN 1670:2207

GENERAL DATA



Logo:	Zimmer
Carton, PU:	1 Piece
Cardboard, weight:	3.3 kg
Cardboard, width:	150 mm
Cardboard, length:	60 mm
Cardboard, height:	100 mm

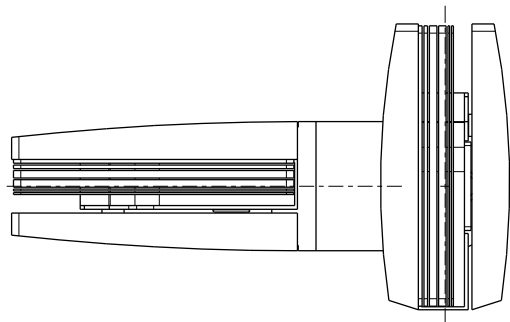




rotation +90°



rotation -90°

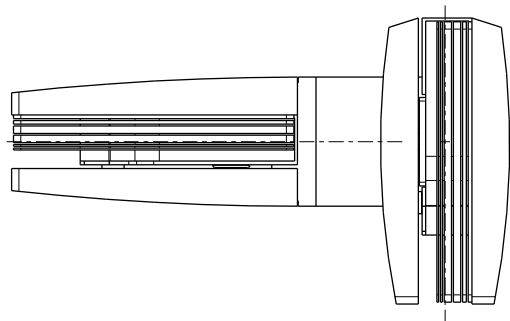

8-13.52
[5/16"-1/2"]
glass thickness

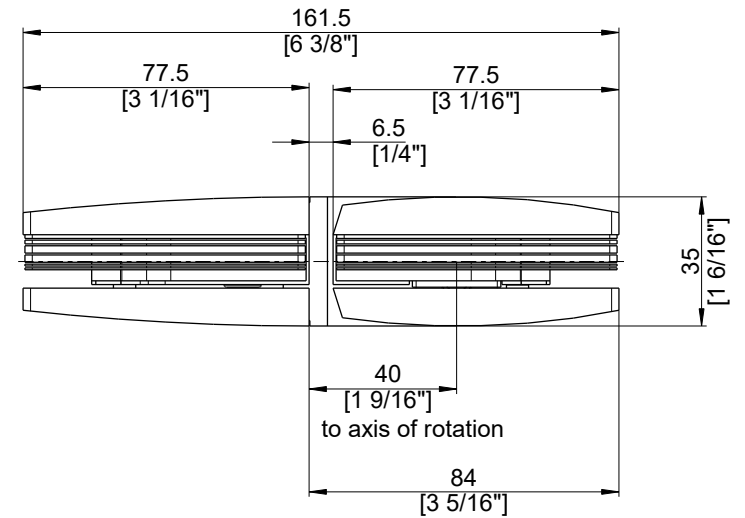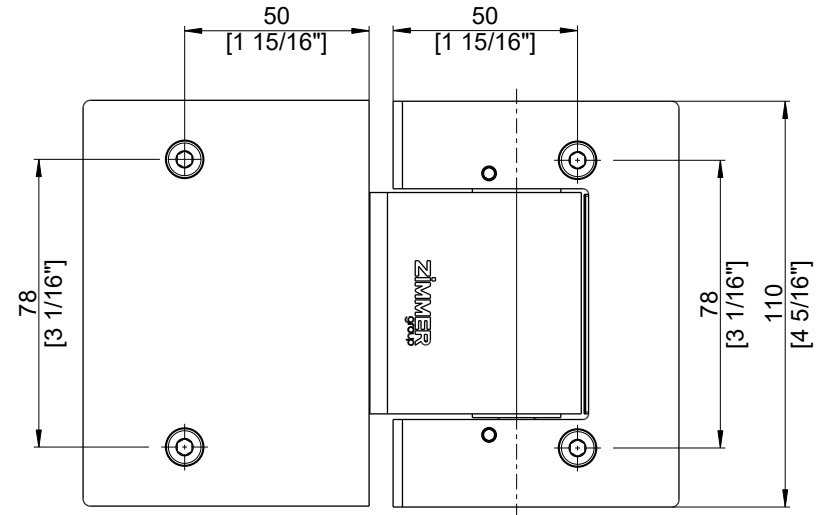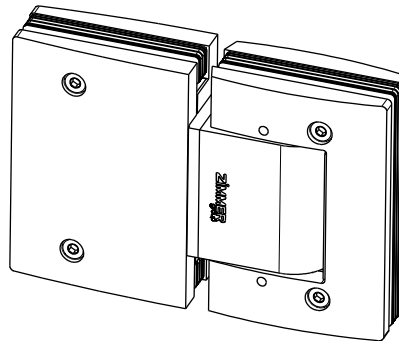

*H010-00-003

Allgemeintoleranzen/
standard tolerances
ISO 2768 T1-m/T2-K

Maßstab scale	5:4	Oberfl. surface	269722mm²	Gewicht weight	1.3126kg
Werkstoff material	-	WerkstNr. mat. no.	-	Volumen volume	452949mm³
Halbzeug dimension	-	RichtstNr. part no.	-	Spalte class	DREHTUER

Alle Rechte vorbehalten! / All rights reserved!
Vervielfältigung, auch nur auszugsweise, nur mit schriftlicher Genehmigung der Zimmer Group.
Reproduction, copying, even in extracts, only with the written approval of Zimmer Group.

Kanten nach/Edges according to ISO 13715		 projection		
a	Änderung		16.10.24	akraus
Ind.	Änderung/modification		Datum	Name

Datum/date	03.09.24	Name/name	akraus
checked			
norm.			
dev.	03.09.24	akraus	

Benennung/name		eaZiflex VITROX 400 Glas-an-Glas-Befestigung	
Zeichnungsnummer/drawing number		H010-00-003_a	
Freigabestatus/status:		Blatt/sheet 5 v. 5 Bl.	
		Format DIN A3	